

# Beta-RAM<sup>™</sup>

radio-HPLC Flow Detector



# The world's leading radio flow detector offers unrivalled sensitivity, resolution and versatility

The all-new Model 6 has impressive features which improve the Beta-RAM's performance and the efficiency of the radiochromatographer.

### **Performance**

#### **Active Counting Mode**

Active Counting Mode allows the system to monitor and adjust run conditions in real-time, dynamically applying the most appropriate settings.

This gives on-line detection limits previously only achieved off-line, as well as improved resolution and peak definition.

#### **Stop Flow**

The stop flow mode allows the user to achieve superb levels of sensitivity previously unavailable with on-line counting methods.

By controlling both the Beta-RAM and HPLC system, the user can define a fraction time and counting time therefore eliminating the labour intensive, time consuming process of fraction collecting.

#### Cell ID

All parameters relative to flow cell type and serial number are seamlessly identified in the Laura software.

Cell ID allows for automatic calculation of eluate residence time and other counting units such as cpm and dpm.

#### Accurate built-in liquid mixing

The Beta-RAM has an built-in scintillator delivery pump accurately controlled by Laura software plus low dead volume mixing tee to provide the very best conditions for sensitive counting of even low energy beta emitters such as <sup>3</sup>H.

#### Support for UHPLC, Rapid Resolution LC, Fast LC

The latest liquid chromatography technologies require dead volumes, connections and flow control of the scintillation cocktail to be finely managed.

The parameters on the Model 6 are optimized to give superb performance with even the most rigorous LC demands.

# Reliability

With over 30 years of development and used by thousands of researchers worldwide the Beta-RAM, coupled with the industry standard Laura software, continues to lead the way for radiochromatographers.

# Integrated Liquid Manifold

The compact and integrated liquid manifold handles the liquid distribution and mixing with scintillation cocktail. The manifold is designed to reduce dead volume to the minimum, ensuring excellent peak shape and resolution.

# **IRIS Technology**

IRIS technology allows users to optimise sensitivity and resolution by making a range of cell volumes available dynamically.

Unlike traditional technologies, which rely on a fixed flow cell volume, the IRIS technology gives a wide range of cell volumes without the need to change the flow cell.




## **Stackable**

The Beta-RAM can be easily stacked with HPLC systems; specifically, it has been designed to integrate with the LabLogic Logi-CHROM HPLC stack.



# **Industry standard software**

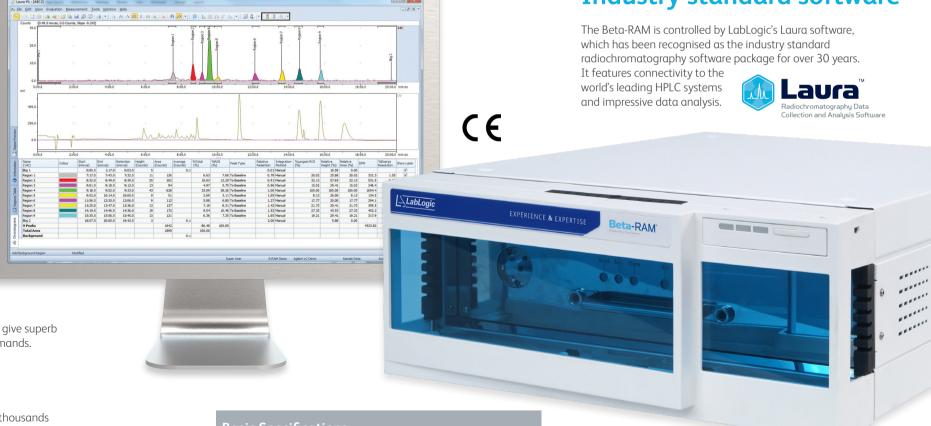

### Basic Specifications

Size 19" (L) x 14" (W) x 6" (H)

Weight 44 lbs

Please refer to the Technical Specification Sheet for further information

# Service and Support

Users of our systems can benefit from our comprehensive, fully inclusive service and support.

We can give reassurance that if things go wrong or you need expert advice, help is only an e-mail or phone call away.

#### **Validation Services**

Our Validation Service enables you to implement and get maximum value from your investments as soon as possible.

We work as a partner with your Quality Manager, System Manager and users to provide a tailored Validation Plan, suited to your needs. Our Validation Specialists have years of experience in GLP system validation, detailed knowledge of our systems, together with other industry standard systems to help you meet company and regulatory requirements.

# **Training**

LabLogic can provide a variety of training courses and workshops to help you get the most out of your instrument and software.

All training is performed by our expert Product and Support Specialists who have many years experience in the development and use of the instruments and software.

Certificates can be provided to complement your internal GLP training records.

#### USA & Canada

LabLogic Systems, Inc.

1911 N US HWY 301, Suite 140 Tampa, FL 33619, USA

E-mail: solutions@lablogic.com Tel: +1-813-626-6848 Fax: +1-813-620-3708

www.lablogic.com

#### **Europe & Worldwide**

LabLogic Systems Limited

Paradigm House, 3 Melbourne Avenue Broomhill, Sheffield, S10 2QJ, UK

E-mail: solutions@lablogic.com Tel: +44 (0)114 266 7267 Fax: +44 (0)114 266 3944

www.lablogic.com







